




Polarization Maintaining Fiber

PMF-RC-1300-B1

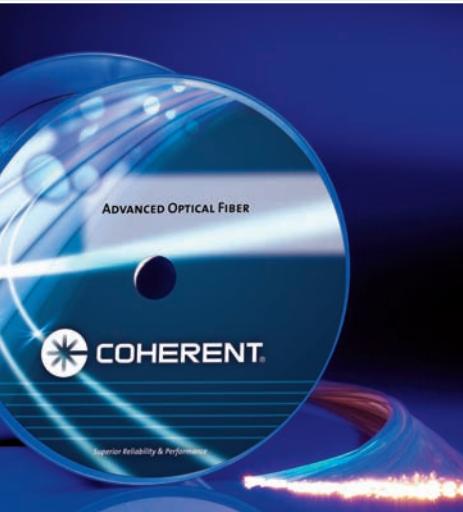

Technical Specifications

Product Code

PMF-RC-1300-B1


Fiber Type	Bow-tie polarization maintaining fiber
Operating Wavelength (nm)	1300
Cut-off Wavelength (nm)	<1250
Mode Field Diameter at 1300 nm (μm)	7.0 ± 0.5
Numerical Aperture	0.16 nominal value
Attenuation at 1300 nm (dB/km)	<2.0
Beat Length at 1300 nm (mm)	<3.0
Outer Cladding Diameter (μm)	80 ± 2
Coating Diameter (μm)	165 ± 5
Core/Cladding Concentricity (μm)	<1.0
Proof Test Level (kpsi)	100
Coating Type	UV-cured dual acrylate

Superior Reliability & Performance

Polarization Maintaining Fiber

PMF-RC-1300-B1

Cross-Section

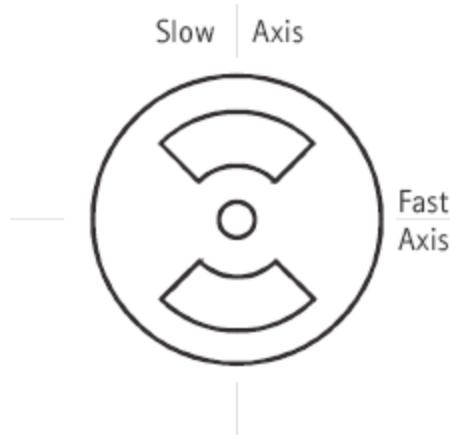

Coherent follows a policy of continuous product improvement. Specifications are subject to change without notice.

Coherent's scientific and industrial lasers are certified to comply with the Federal Regulations (21 CFR Subchapter J) as administered by the Center for Devices and Radiological Health on all systems ordered for shipment after August 2, 1976.

Coherent offers a limited warranty for all polarization maintaining fibers. For full details of this warranty coverage, please refer to the Service section at www.Coherent.com or contact your local Sales or Service Representative.



**Coherent, Inc.,
Corporate Headquarters**
5100 Patrick Henry Drive
Santa Clara, CA 95054

Coherent Salem
32 Hampshire Road
Salem, NH 03079
phone (603) 685-0907
fax (603) 893-5604
e-mail fiber@Coherent.com

Benelux	+31 (30) 280 6060
China	+86 (10) 6280 0209
France	+33 (0) 6985 5145
Germany	+49 (6071) 968 333
Italy	+39 (02) 34 530 214
Japan	+81 (3) 5635 8700
Korea	+82 (2) 460 7900
UK	+44 (1353) 658 833